




# TIPP-KICK®

## ASSEMBLING THE GOALKEEPER CONTROL BOX

open the box:



position of the wires:

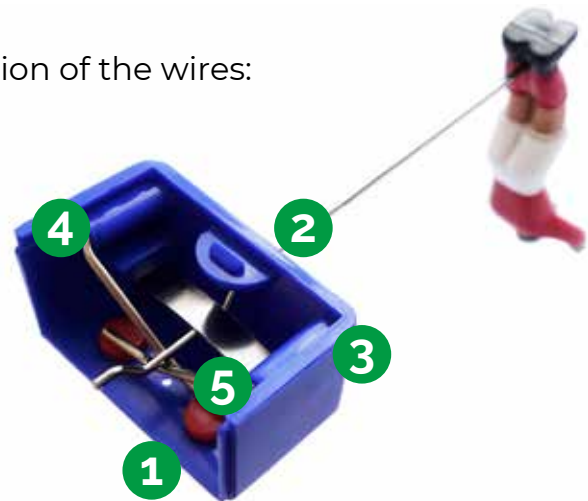

The TIPP-KICK hotline receives regular enquiries from people who would like to know how to correctly re-assemble a dismantled control box. Here are the official instructions...

To assemble the goalkeeper control box, initially insert the little red buttons into the appropriate holes on the box (1).

Subsequently attach the goalkeeper crank to the body of the goalkeeper with the bent wire rod at one end, inserting the other end of the crank into the central hole on the blue control box (2).

It is now possible to insert the leaf spring (3) and attach the left lever (4) and the right lever (5) at the correct points.

All that remains is to shut the lid of the control box so that the end of the goalkeeper crank fits into the correct bearing on the lid (6).

Stand: 03/2018

EDWIN MIEG OHG • Postfach 3448 • D-78023 Villingen-Schwenningen • Tel.: 07720-855880